



19" Power Distribution Unit, 7 way German Sockets, 3 Lights Surge Protection with Filtering and Overload Protection

Art no.: PDU7C02

Technical Features

1U rack mountable design

IEC 60297: 482.6 mm (19") mounting

Robust aluminum housing, IP20

Sockets: 7x German type socket CEE7/3, 45° angled

1.8 m connection cable H05VVF 3x1.5 mm² with Safety plug CEE 7/7, angled


Power: 230 Vac 50 Hz/16 A, max. 3600 W

3 lights surge protection with filtering and overload protection

Works with data centers, server rooms and Telecom equipment

Color: Black

Technical Drawing

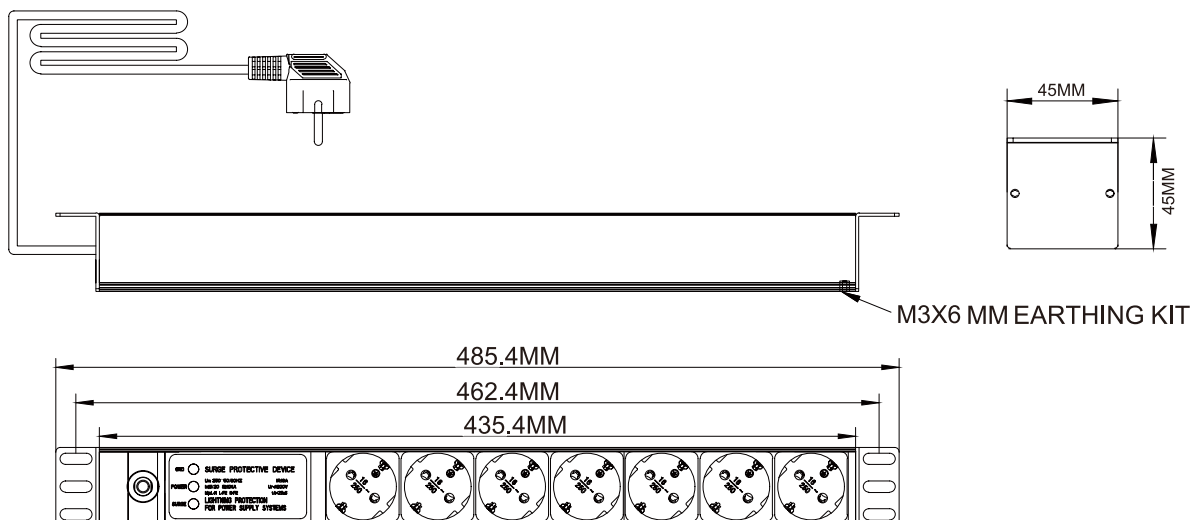

PDU7C02



Made in China

www.2direct.de



* The specifications and pictures are subject to change without notice.
* All trade names referenced are the registered trademarks of their respective owners.

LED Indication

Yellow Light (GND)	ON: Input power have earthing connection OFF: Input power does not have earthing connection	GND POWER SURGE SURGE PROTECTIVE DEVICE U_n: 250~50/60HZ I_n(8/20) S:10KA M: L-N L-PE N-PE LIGHTNING PROTECTION FOR POWER SUPPLY SYSTEMS IR:16A U_r<1000V tA<25uS
Red Light (Power)	ON: Power on OFF: Power off	
Green Light (Surge Protection)	ON: PDU is under surge protection OFF: PDU is without surge protection	

Specification

Rated Voltage	250 V
Rated Frequency	50 Hz
Rated Load Current	16 A
Maximum Continuous Operating Voltage U _c	300 V
Nominal Discharge Current I _n (8/20) μs	9 kA
Maximum Discharge Current I _{max} (8/20) μs	9 kA
Response Time	≤50 mS
Surge Energy	375 J
Leakage Current	0.2 mA
Protection Mode	L-N, L-PE, N-PE



Package Contents

1x 19" Power Distribution Unit

1x Screw Package

1x User Manual

Packaging Information

Packing Dimension	515 x 95 x 60 mm
Packing Weight	0.98 kg
Carton Dimension	530 x 320 x 220 mm
Carton Q'ty	10 pcs
Carton Weight	10.3 kg

PDU7C02



4 052792 068733

Made in China

www.2direct.de



* The specifications and pictures are subject to change without notice.
* All trade names referenced are the registered trademarks of their respective owners.