

# LogiLink®

## USB Industrial Hub With External Power Supply


Art. No.: UA0443  
UA0444



LogiLink's USB industrial hub is made of robust metal enclosure, which makes it ideal for use in industrial environments and provides enough USB ports for your workspace. With its frame for screw mounting, you can decide for yourself where you want to mount the hub, be it on or under the desk, or rather screwed to the wall.

### Features:

- » USB 3.0 data ports provide up to 5 Gbps transfer speed
- » Equipped with over-current detection and protection
- » DIN-rail rack mount accessories and ear mount accessories enclose
- » Supporting 7–30 V voltage input
- » Housing made of high-quality aluminum
- » LED indicator for each USB port
- » Plug and play
- » Compatible with Windows, Mac OS, Chrome OS and Linux

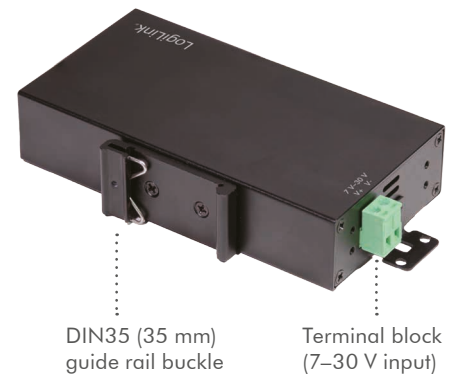

DIN35 (35 mm)  
guide rail buckle

Terminal block  
(7–30 V input)



⚡ External  
power  
supply

USB-B  
input

4x USB-A outputs

Mounting  
ear



⚡ External  
power  
supply

USB-B  
input

7x USB-A outputs

Mac OS  
Windows  
Supported

5G  
Data Rate

LED  
Indication

Aluminum

Over  
Current  
Protection

Power  
Adapter

DIN-Rail  
Mountable

Plug  
&  
Play



\*The specifications and pictures are subject to change without prior notice.  
\*All trade names referenced are the registered trademarks of their respective owners.

## Specifications:



|                                 |                                            |                        |
|---------------------------------|--------------------------------------------|------------------------|
| Art. No.                        | UA0443                                     | UA0444                 |
| EAN Code                        | 4052792076479                              | 4052792076486          |
| Output Ports                    | 4x USB-A female                            | 7x USB-A female        |
| Input                           | 1x USB-B female & 1x DC in                 |                        |
| USB Version                     | USB 3.0                                    |                        |
| Data Transfer Rate              | Up to 5 Gbps                               |                        |
| USB Power Output                | 5 V/2 A (10 W max.)                        |                        |
| External Power Supply           | DC 12 V/2 A, 24 W max.                     | DC 12 V/4 A, 48 W max. |
| Protections                     | Overcurrent, overvoltage and short circuit |                        |
| Standby Power Consumption       | 0.07 W                                     |                        |
| LED Indicator                   | Yes                                        |                        |
| DIN Rail                        | Yes                                        |                        |
| Surge Protection                | 350 W                                      |                        |
| Conducted Discharge Test        | 4 kV                                       |                        |
| Air Discharge Test              | 8 kV                                       |                        |
| 2pin Terminal Power Plug        | Yes                                        |                        |
| Housing Material                | Aluminum                                   |                        |
| Color                           | Black                                      |                        |
| Cable Length                    | 1 m                                        |                        |
| Compatibility                   | Windows, Mac OS, Chrome OS and Linux       |                        |
| Operating Temperature           | 0–70°C                                     |                        |
| Operating Humidity              | 10–85% RH (non-condensing)                 |                        |
| Dimensions (Cable not included) | 9.12 x 6.74 x 2.82 cm                      | 12.78 x 6.74 x 2.82 cm |
| Weight                          | 145.5 g                                    | 191 g                  |

### Specification of External Power Supply (UA0443):

|               |                              |
|---------------|------------------------------|
| Input Voltage | 100–240 V, 50/60 Hz 1 A max. |
| Output Power  | 12 V/2 A, 24 W               |
| DC Plug       | 5.5 x 2.5 mm                 |
| Dimensions    | 71.5 x 43.6 x 30 mm          |
| Cable Length  | 1 m                          |
| Weight        | 124 g                        |



**Specification of External Power Supply (UA0444):**

|               |                                |
|---------------|--------------------------------|
| Input Voltage | 100–240 V, 50/60 Hz 1.7 A max. |
| Output Power  | 12 V/4 A, 48 W                 |
| DC Plug       | 5.5 x 2.5 mm                   |
| Dimensions    | 107 x 50 x 33.1 mm             |
| Cable Length  | 1 m                            |
| Weight        | 246.5 g                        |



**Package Contents:**

- » 1x USB Hub
- » 1x USB-A to USB-B Cable
- » 1x External Power Supply
- » 1x Installation DIN Rail
- » 3x Screw Set (Each 5 pcs)
- » 2x Table Mounting Ear
- » 1x User Manual

**Package Information:**

| Art-No. | Packing Dimension | Packing Weight | Carton Dimension   | Carton Q'ty | Carton Weight |
|---------|-------------------|----------------|--------------------|-------------|---------------|
| UA0443  | 180 x 140 x 55 mm | 0.45 kg        | 390 x 300 x 300 mm | 20 pcs      | 9.6 kg        |
| UA0444  | 180 x 140 x 55 mm | 0.55 kg        | 390 x 300 x 300 mm | 20 pcs      | 11.5 kg       |