LogiLink
PROFESSIONAL

Network Installation Cable
Cat.6 S/FTP, White

Technical Features

Performance: Cat.6 Class E up to 30m

Standards: ISO/IEC 11801, TIA/EIA 568

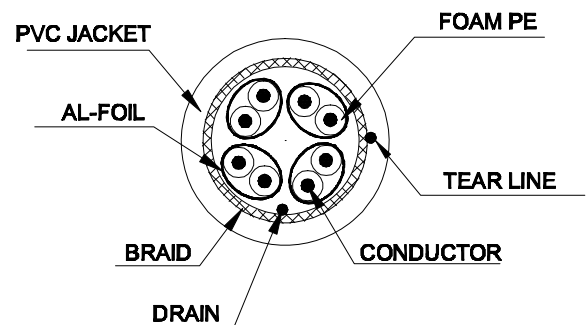Application: Cat.6 cabling up to 30m

Conductor: CCA wire Ø0.57 mm AWG23

Shielding: 4 individually screened pairs (PIMF), copper braid (tinned)

Sheath: PVC, white, Ø6.7 mm outer cable diameter

Fire Protection Class: Eca (EN50575:2014/A1:2016)

Length	Part no.	EAN Code
50 m	CPV0043	4052792047769
100 m	CPV0039	4052792032079
305 m	CPV0038	4052792008999

PVC JACKET   FOAM PE
AL-FOIL   TEAR LINE
BRAID   CONDUCTOR
DRAIN

www.logilink.de

RoHS compliant

CE

LogiLink® PROFESSIONAL

Package Contents

CAT6 Installation Cable x 1

Packaging Informations

Packing Dimension	390 x 390 x 220mm (CPV0038)/260 x 260 x 100mm (CPV0039)
Packing Weight	9kg (CPV0038)
Carton Dimension	460 x 410 x 410mm (CPV0038)
Carton Q'ty	2pcs (CPV0038)
Carton Weight	18.5kg (CPV0038)

www.logilink.de

RoHS compliant

Made in China