



Installation Cable U/UTP Cat.6, PrimeLine, LSZH


LogiLink's CAT6 unshielded twisted pair (UTP) cable is preferable for indoor high speed networks. This CAT6 UTP cable is well suited for voice, data, video, and security applications. It meets or exceeds industry standards. The 23 AWG diameter solid bare copper conductors are configured in unshielded twisted pairs for low attenuation and excellent crosstalk qualities. This CAT 6 UTP cable is jacketed in low smoke zero halogen (LSZH) coating, and is intended for indoor usage.

Technical Specifications

- U/UTP Cat.6 solid network cable
- 4 x 2 x 23 AWG Bare copper conductors
- According to ISO/IEC 11801, EN 50173-1, EIA/TIA 568C.2
- Sheath: LSZH, grey

Operation Conditions

	Static	Dynamic
Temperature range (Indoor)	-20°C to +60°C	0°C to +50°C
Bending radius	Static 4 x D	Dynamic 8 x D
Fire behaviour	LSZH, CPR class: Eca	

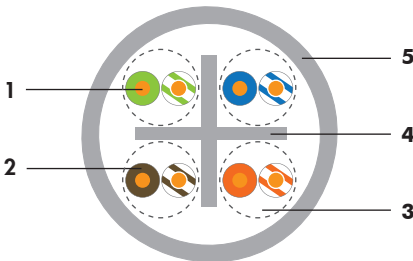

- 1. Conductor:** 100% copper solid wire
- 2. Insulation:** PE compound
- 3. Twisting:** 2 cores twisted in a pair
- 4. Separating cross element:** MDPE compound
- 5. Outer jacket:** LSZH compound

Cable type	Dimension	Sheath	Sheath Color	Outer diameter (mm)
Indoor	4x2x23 AWG	LSZH	Grey	6.0

Packing

The cables are delivered on non-returnable carton boxes of 100m or 305m

Part no.	Length (m)	EAN
CQ2100U	100	4052792027440
CQ2305U	305	4052792027457



* The specifications and pictures are subject to change without notice.
*All trade names referenced are the registered trademark of their respective owners.