
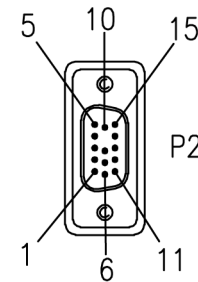


HDB15P/M

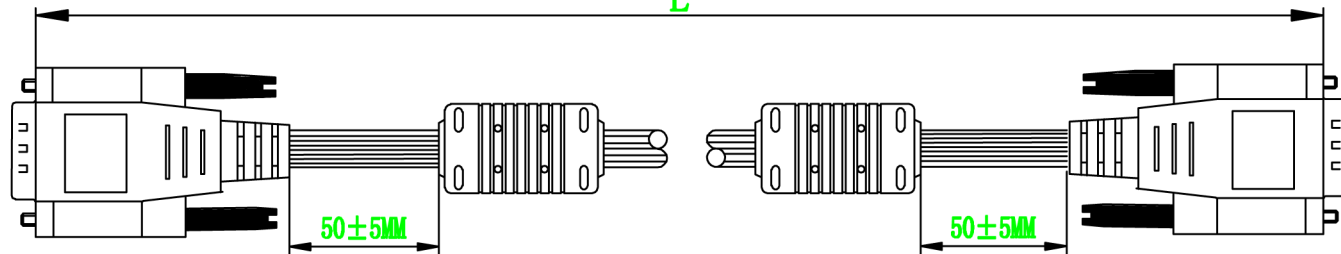

HDB15P/M

NOTES:

1. MATERIALS

1.1 CABLE: {[7/0.12TC+7/0.12CCS+AM+PVC]\*3COAX+(7/0.12CCS+PVC)\*7C+AM+7/0.12CCS+B(128/0.12ALM)+BLACK PVC JACKET .

OD:8.2±0.2mm.

CABLE MARKING:E324703 AWM STYLE 2919 80°C 30V LOW VOLTAGE COMPUTER CABLE

1.2 P1: HDB 15PIN MALE: SOLDER TYPE, BLUE PBT INSULATION, EMPTY NINE PIN, GOLD FLASH CONTACTS, NICKEL PLATED SHELL;

1.3 THUMB SCREW TO BE MOLDED BLACK PVC.

1.4 FERRITE TO BE MOLDED BLACK PVC.

1.5 HOOD MOLDED BLACK PVC.







2. TESTING: 100% OPEN AND SHORT TEST.

3. PACKING:1PCS/PE BAG .

4. ALL MATERIAL BE REACH COMPLIANT.

PIN OUT


P1 ——— P2



SHELL ——— DRAIN ——— SHELL



CUSTOMER NO	L (MM)	EAN code
CV0001	1800±50	4260113560181
CV0002	3000±70	4260113560198
CV0003	5000±70	4260113560204
CV0016	10000±150	4260113562505
CV0018	20000±300	4260113562512
CV0017	15000±200	4260113562994

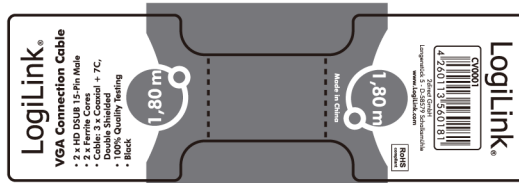

Remove coil grey PVC, Black Size: 40x40x10mm, L: 100mm, P: 10mm, R: 10mm, S: 10mm, T: 10mm, U: 10mm, V: 10mm, W: 10mm, X: 10mm, Y: 10mm, Z: 10mm

LENGTH TOLERANCE: X ± 0.5 .X ± 0.2 .XX ± 0.1	SCALE: FREE	CUS. NAME:	
ANGLE TOLERANCE: X° ± 3° .X° ± 1°	UNIT: mm		
VERSION: 00	PAGE: 1/1		

2direct GmbH

PRODUCT NO:

CUSTOMER NO:

ENG: XIAO

CHECKED:

DRAWING NO: 0916

PRODUCT DESCRIPTION: VGA 3+7, HDB15P M/M+FERRITE

APPROVED:

00	NEW ISSUE	2014-09-06
REV.	MODIFY DESCRIPTION	DATE