



Electrical Test:

1. 100% Test (Open, Short, Mis Wire)
2. Contact Resistance: 10 ohm max.
3. Insulation Resistance: 10M ohm min.
4. Hi-Pot Test: DC 300V/10ms

Packing: 1PC in one PE Bag with Logilink sticker



PIN Assignment

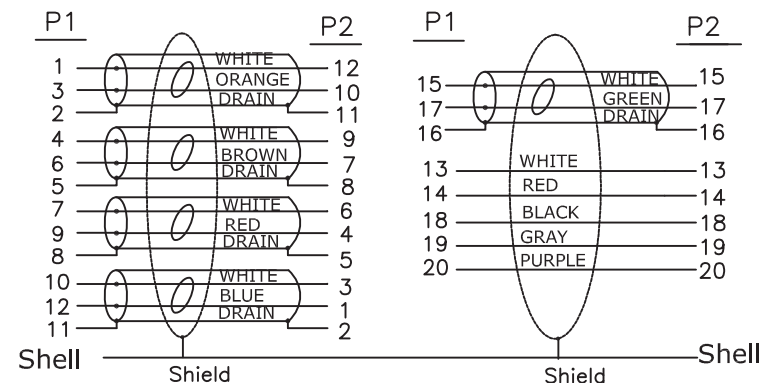

11	A10-R042175	W*L=20*55MM FOIL COPPER	2	pcs
10	A5-R047011	Inside Molding:PE	4	g
9	A5-R047001	45P PVC COLOR:BLACK	10	g
8	A10-R075270	H.S.T:Ø1.5*5mm.	10	pcs
7	A10-R075143	H.S.T:Ø1.0*10mm.	2	pcs
6	A10-R075149	H.S.T:Ø2.5*15mm.	10	pcs
5	A6-0000099	DisplayPort TRANSPARENT DUST COVER	2	pcs
4	A2-R021276	DisplayPort (DP01#) M BLACK ABS DAWN SHELL	2	pcs
3	A2-R021275	DisplayPort (DP01#) M BLACK ABS UP SHELL	2	pcs
2	A2-R021284	Display Port M INSULATION:BLACK,SHELL GOLD,PIN GOLD PLATED 5U WITH PCB	2	pcs
1	A4-R001574	Display Port UL20276 (7/0.127TA*1PR+EAM)*5+7/0.127TA*5C+AEB(AL)85% OD:7.3MM JACKET COLOR:BLACK	10	M
NO	P/N	DESCRIPTION	Q'TY	UNIT

REV.	TOLERANCE		DESCRIPTION	DATE
	INCHES	M/M		
.X	.015	.30	2Direct GmbH TITLE: DisplayPort M TO M L=10M	
.XX	.010	.10		
.XXX	.005	.05		
DRAWN BY			CUSTOMER :	
CHECK BY			CUSTOMER P/N :	CV0033
APPD BY			SCALE	NONE
	DATE	2010/12/06	UNIT	MM
			DRAWING NO.:	CA0010211
			REV. A	1/2