



## Fan Module for Canovate Floor Standing Rack

### Technical Features

Material:	0.8 mm steel
Air Flow:	95–115 CFM
Operating Voltage:	AC 220–240 V, 50/60 Hz
Fan Speed:	2700–3100 rpm
Noise:	44–49 dB (A)

These fan units are required for the ventilation of floor-standing-cabinets. They are installed under the top cover of the server- or network cabinet. It is equipped with a thermostat, fuse and power cable.

### Fan Module - RAL 9005 Black


H (mm)	D (mm)	W (mm)	Number of Fans	Weight (kg)	Part No.	EAN Code
47	375	363	2	2.90	FAS121B	8698800001447
47	375	363	4	3.95	FAS122B	8698800001461

### Fan Module - RAL 7035 Light Grey

H (mm)	D (mm)	W (mm)	Number of Fans	Weight (kg)	Part No.	EAN Code
47	375	363	2	2.90	FAS121G	8698800001430
47	375	363	4	3.95	FAS122G	8698800001454



\* The specifications and pictures are subject to change without notice.  
 \*All trade names referenced are the registered network of their respective owners.

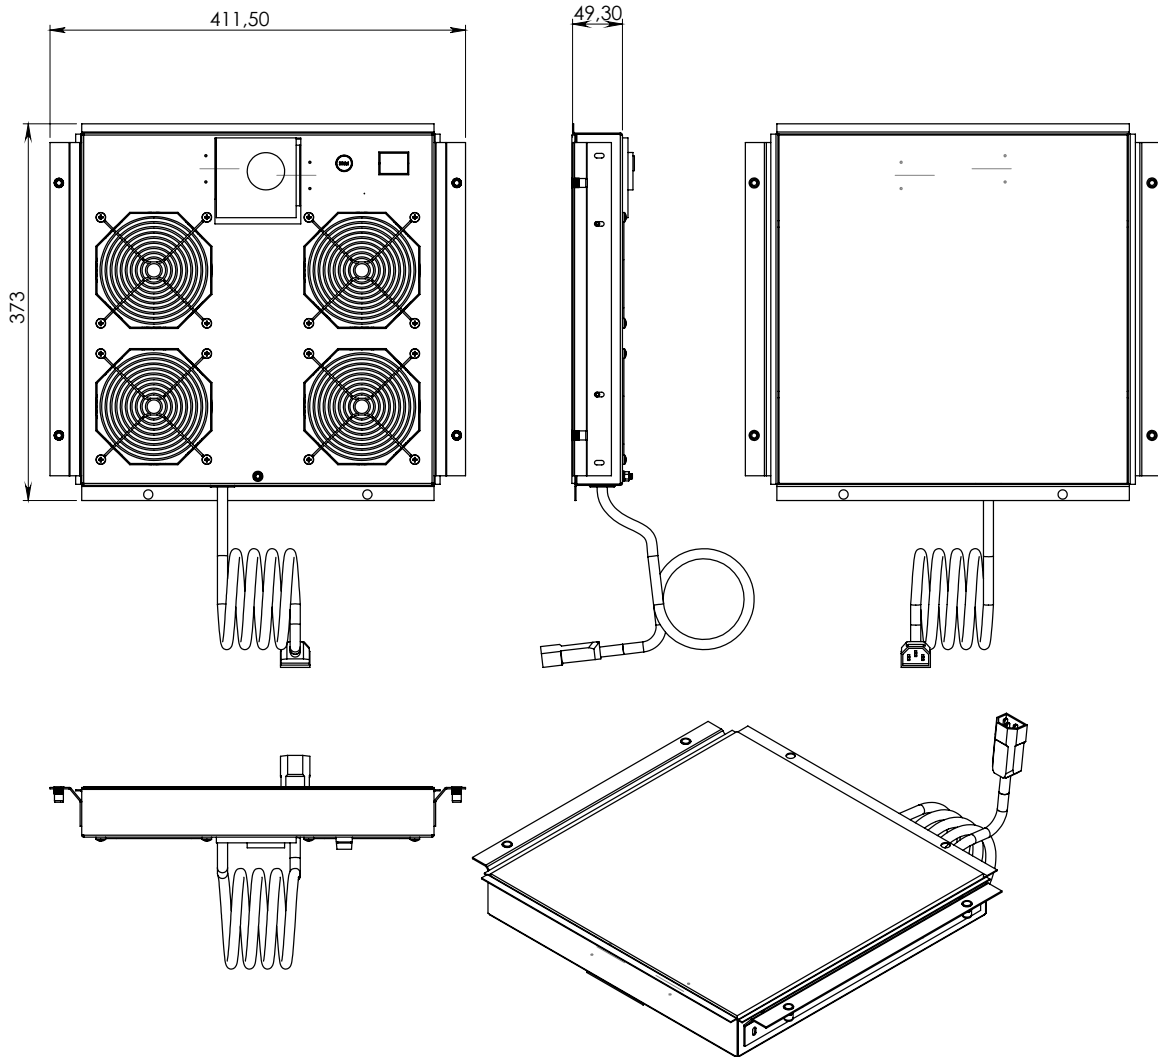

GENEL TOLERANSLAR X DIN 7168-m	OLCU TOL.	>0-6 ±0.1	>6-30 ±0.2	>30-120 ±0.3	>120-315 ±0.5	>315-1000 ±0.8	>1000-2000 ±1.2
--------------------------------------	--------------	--------------	---------------	-----------------	------------------	-------------------	--------------------

BOLZEN YSB M4x15MAVI ZINK DIN 7985 2  
 484 05316 5010 M5X10 YSB SCHRAUBEN 20  
 484 10110 1640 NUT AK M4 BLAU ZINK DIN 934 2  
 484 10110 1650 NUT AK M5 BLAU ZINK DIN 934 2  
 484 10515 1243 FLACHSTAHL M4 STAHL BLAU CHROM 2  
 484 10515 1250 ROTIEREND FLACH M5 BLAU ZINK 4  
 484 16020 ZPAC C14 STECKER 1  
 484 20010 CBED PVC TÜR LOCH GROM 1.5 \* 20 \* 25 MM 1  
 484 21010 SACR GEBLÄSE 220-240V 15W AC 50/60 Hz 0.12A 85cfm 42dB 4  
 484 21010 SDEA 120x120 Lüfter Schutzgitter 4  
 485 63150 0200 Glassicherungshalter 1  
 001269P00 4 LI FAN MONTAGEFILTERBLATT 1  
 001270T00 4 FILTERFILTER 1

040064S02 S70 FAN INSTRUMENT ASSEMBLY 2  
 48420010NACU TERMOSTAT 1  
 48743113AAAF KABEL 3 \* 1,5 TTR (BLACK MULTI PRESS WIRELESS) L = 2,5 Meter 1  
 Y13 0000X MBAA 4LU GEBLÄSESPATRONE 1  
 484100316025 KABELVERPACKUNG M6 \* 2.5 ISOLIERBARE FLAMMABLE 1  
 484100372262 KABELADAPTERTRÄGER 19 \* 19 MM NAILLON 1  
 484100511011 KABELANSCHLUSS 3.6 \* 141 MM WEISS 1  
 487601040409 M. BOX UNBOXED 375x525x70 mm (6x Lüfter) 1  
 48421010SDDB CAM SIGORTA 4 AMP 1  
 48421010SDGA KABEL 2X0.75MM 2 LI YASSI CORDON 0.3  
 48740540APM MACRON MIT 5 MM HEIZUNG K-53013 0.04  
 48421011NDLV 4 LI FAN VERKABELUNG (KABEL + TERMINAL + HEIZMASCHINE) 1  
 484095103015 PEM S M3-1 STAHL BLAU ZINK



RoHS  
compliant



\* The specifications and pictures are subject to change without notice.  
 \*All trade names referenced are the registered network of their respective owners.