

Cat.5e Keystone Jack

Art no.: NK4006A

Technical Features

Cat.5e Class D 100 MHz

Complies with ISO/IEC 11801 & TIA/EIA 568


UTP (unshielded version)

180° punch down

AWG 23–26, suitable for cable Ø5–6 mm

Color: white

Technical Drawing

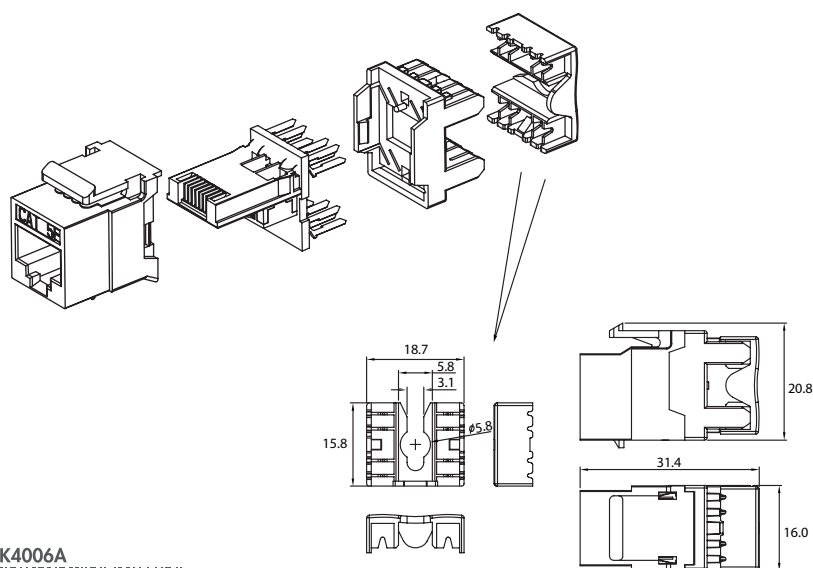

Electrical Specifications

Insulation Resistance: 500M ohms (min.)
Contact Resistance: 20M ohms (max.)
Current Rating: 1,5 Amps.
DC Resistance: 0,1 ohms (max.)
Withstanding Voltage: 1000 VAC RMS@60 Hz/1 min

Mechanical Specifications

IDC Punch Down Cycle: Over 25 Cycles (min.)
RJ-45 Jack Insertion Cycle: Over 200 Cycles (min.)

Environmental

Storage Temperature: -40° to +85°
Operation Temperature: 0° to +70°

NK4006A



4 052792 031874

Made in China

www.2direct.de



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.

Package Content

Cat.5e Keystone Jack x 1

Packaging Information

Packing Dimension	100 x 70 x 20 mm
Packing Weight	0,01 kg
Carton Dimension	530 x 320 x 300 mm
Carton Q'ty	1000 pcs
Carton Weight	9 kg



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.