



## Cat.6A Inline Coupler

Art no.: NP0025U

### Technical Features

Cat.6A Class EA 10G 500MHz


ISO/IEC 11801 and TIA/EIA-568-C.2

2x RJ45 female jack, 1:1 pin wiring, unshielded

Supports PoE, PoE+ and PoE++

Compact housing, white

### Technical Drawings



#### ELECTRICAL

1. Contact Resistance: 20MΩ MAX
2. Insulation Resistance: 500MΩ MIN@500V DC
3. Withstand Voltage: DC 1000V AC 700V RMS 60Hz, 1MIN
4. Component testing for Cat.6A to ISO/IEC 11801 Ed.2.2:2011-06  
DIN EN 50173-1:2011-09 TIA/EIA-568-C.2 (2009-08)

#### ENVIRONMENTAL

1. Storage: -40° to +70°
2. Operation: -10° to +60°

#### MECHANICAL

1. RJ45 Contact Life: 750 Times Min
2. Plug Inforce<30N

NP0025U




Made in China

[www.logilink.com](http://www.logilink.com)



**RoHS**  
compliant

\*The specifications and pictures are subject to change without prior notice.  
\*All trade names referenced are the registered trademarks of their respective owners.

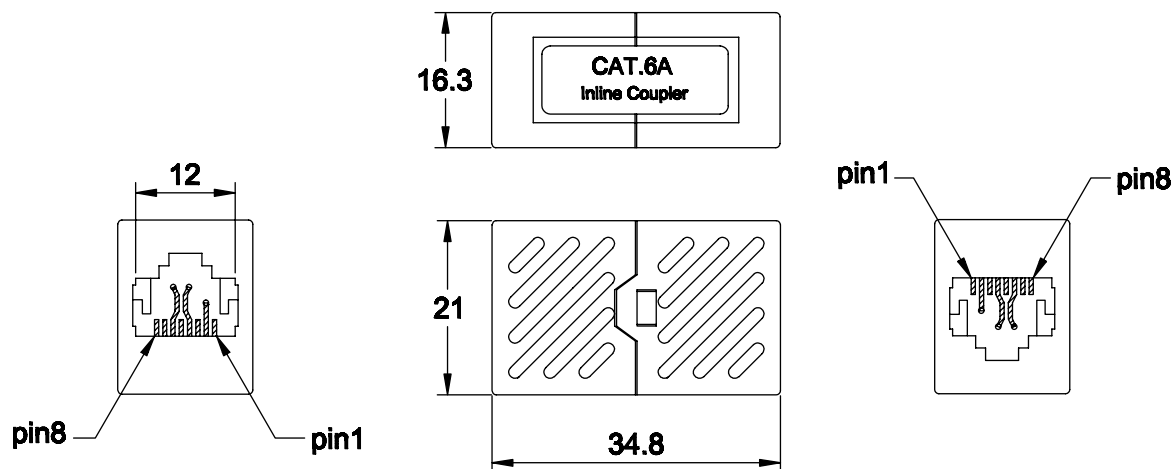

Unit: mm

## Package Content

Cat.6A Inline Coupler x 1

## Packaging Information

Packing Dimension	60 x 80mm
Packing Weight	8g
Carton Dimension	420 x 263 x 450mm
Carton Q'ty	1000pcs
Carton Weight	11kg



NP0025U



4 052792 045031

Made in China

[www.logilink.com](http://www.logilink.com)



RoHS  
compliant

\*The specifications and pictures are subject to change without prior notice.  
\*All trade names referenced are the registered trademarks of their respective owners.