

# LogiLink®

## AA Rechargeable Battery Ni-MH Mignon 1.2V

Art. No.: LR6RB4



The LogiLink Ni-MH Rechargeable batteries are perfect for digital cameras, remote, toys or other household devices with reliable and long lasting energy.

### Features:

- » Ni-MH rechargeable technology ensures power for high drain devices
- » Recharge up to 500 times (work with PA0168 Ni-MH Battery charger)
- » The batteries are pre-charged and ready to use right out of the pack
- » Maintain up to 85 % of their charge after 1 year (when not in use)
- » 0% Mercury and Cadmium, free from harmful heavy metals
- » Battery remains fresh for use for up to 5 years
- » LogiLink offers a range of most frequently used batteries (AA/AAA/C/D/3V/9V) in different packaging variations to meet your needs



### Specification:

Type	Nickel-Metal Hydride cylindrical single set
Voltage	1.2V
Capacity	2500mAh
Battery Cycle	≥500 cycles
Standard Charging Temperature	15°C ~25°C
Fast Charging Temperature	0°C ~ 45°C
Storage Temperature	-20°C~35°C
Discharge Temperature	0°C ~ 45°C
Dimension	Ø14.5 x 50.5mm



LR6RB4



Made in China



\* The specifications and pictures are subject to change without notice.  
\* All trade names referenced are the registered trademark of their respective owners.

Best Connectivity





# LogiLink®

## AA Rechargeable Battery Ni-MH Mignon 1.2V

Art. No.: LR6RB4



### Charge/Discharge Curve:

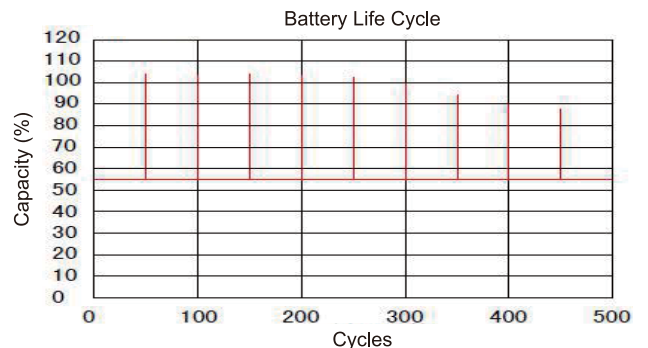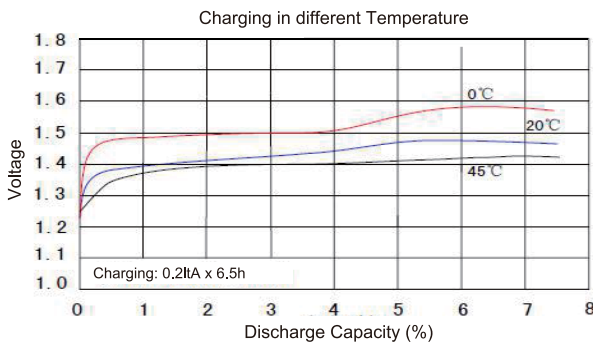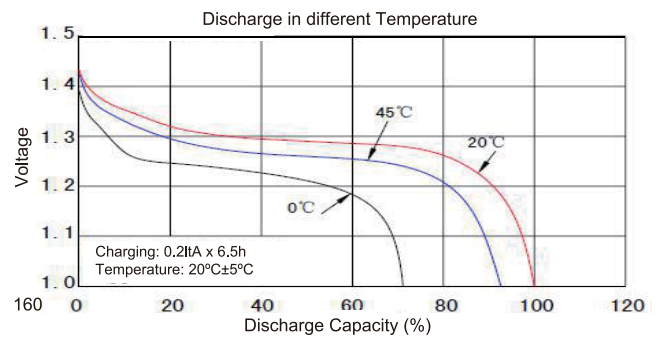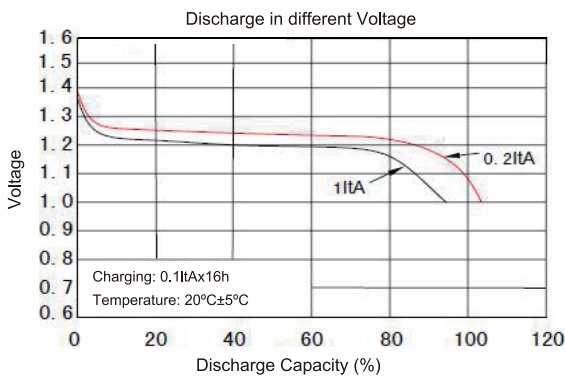

### Package Contents:


- » 1 x AA Rechargeable Batteries pack

### Package Informations:

- » Paking Dimension: 85 x 117 x 15mm
- » Paking Weight: 0.124kg
- » Carton Dimension: 275 x 260 x 195mm
- » Carton Q'ty: 120pcs
- » Carton Weight: 15.9kg

### Warning

- \*Battery should be charged prior to use.
- \*Do not put in fire.
- \*Do not open.
- \*Please remove empty batteries; and charge with Ni-MH battery charger.
- \*Insert batteries in correct way (+/-).
- \*Delivery Capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

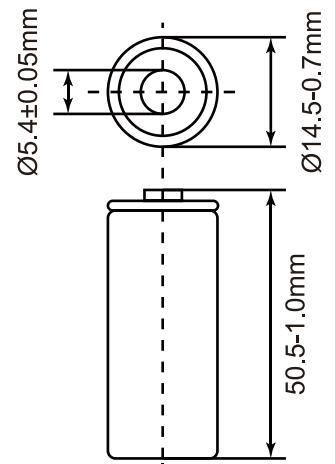

LR6RB4



Made in China



\* The specifications and pictures are subject to change without notice.  
\* All trade names referenced are the registered namework of their respective owners.

Best Connectivity